

## 1244 Series

Vertical DVI-I w/ Shield

### Ordering Information

1244 - X4X - XBX - XX



### Dimensions

### Specification

#### Materials:

- ◆ **Insulator:** High Temperature Glass Fiber Reinforced Thermoplastic, UL94V-0, Ivory Color
- ◆ **Shell:** Steel With Nickel Plating (Tin on Request)
- ◆ **Contact :** Copper Alloy
- ◆ **Plating:** Gold on Contact Area And Tin on Solder Tail
- ◆ **Grounding Clip:** Copper Alloy With Tin Plating


#### Electrical:

- ◆ **Contact Resistance:** 20 Milliohms Maximum.
- ◆ **Dielectric Withstanding Voltage:** 500 VAC R.M.S.
- ◆ **Contact Resistance:** 20 Milliohms Maximum
- ◆ **Insulation Resistance:** 100 Megaohms Min
- ◆ **Voltage Rating :** 40 VOLTS AC(RMS) Continuous Maximum.


#### Environmental:

- ◆ **Temperature range:** -55°C to + 125°C

1244 Series Dimensions, 1244-X4X-XBX-XX

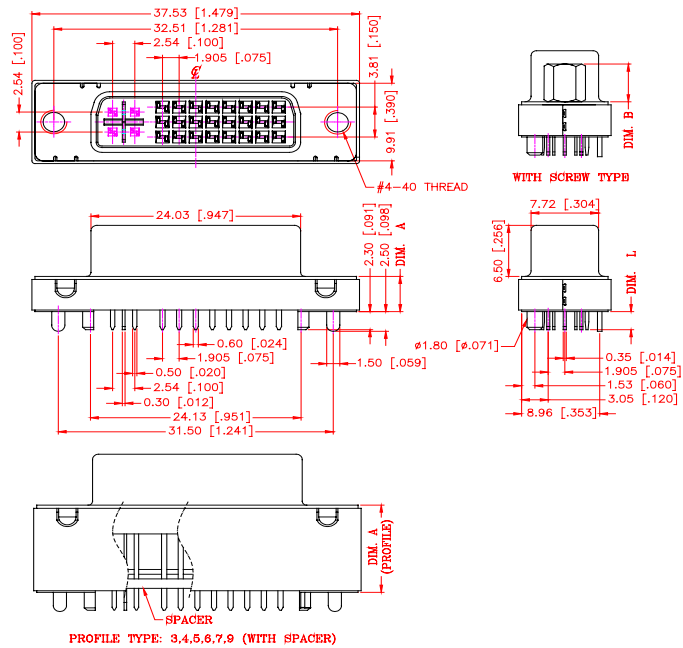

RECOMMENDED P.C.B. LAYOUT

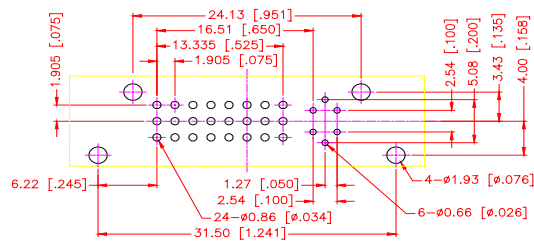

\* ALL DIMENSIONS ARE SHOWN IN in/mm.

❖ All Dimensions are shown in in/mm.

❖ The above ordering data is for our standard products. For Non-Standard products, please contact TEKCON Electronics Corporation.