
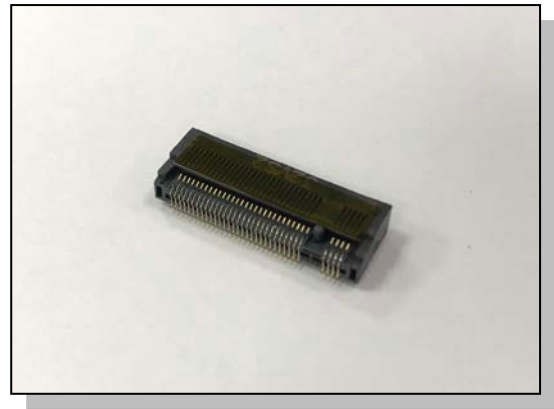


AS Series

M.2 (NGFF) CONNECTOR KEY-M

Ordering Information

AS0BC2X - S40BM-XH

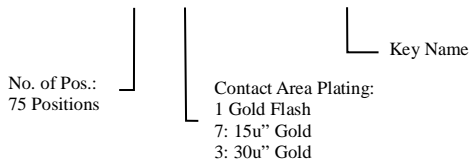


Specification


- **Material:**
 - ◆ **Insulator:**
Thermoplastic UL 94V-0
Color: Black
 - ◆ **Contact:** Copper Alloy
 - **Electrical:**
 - ◆ **Dielectric Withstanding Voltage:**
300 VAC
 - ◆ **Contact Resistance:**
55 mΩ max. per pin initial, 75 mΩ max. per pin after testing.
 - ◆ **Insulation Resistance:**
500 MΩ Min.
 - **Mechanical:**
 - ◆ **Insertion Force:** 20N Max.
 - ◆ **Withdrawal Force:** 20N Max.
 - **Environmental:**
 - ◆ **Temperature range:** -40°C to + 80°C
- ❖ The above ordering data is for our standard products. For Non-Standard products, please contact us.

Drawing

AS0BC2X-S40BM-XH Series

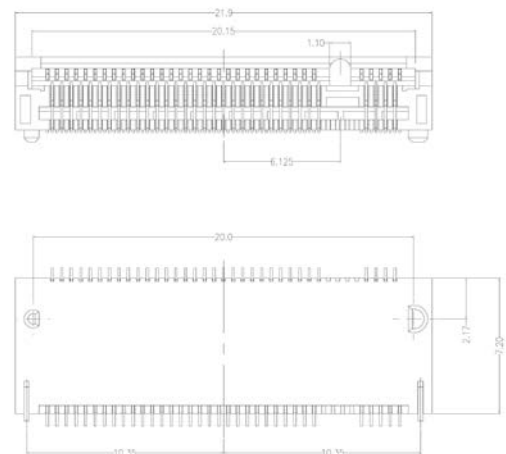

RECOMMENDED P.C.B. LAYOUT

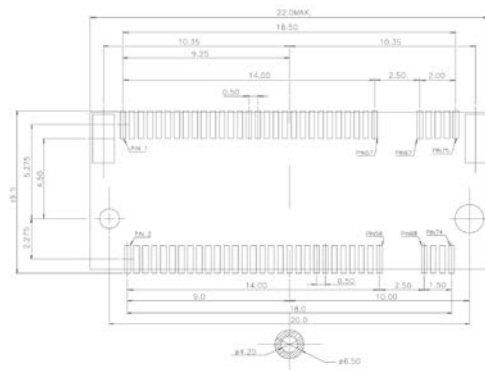

* ALL DIMENSIONS ARE SHOWN IN mm/in