AS Series

MXM 3.0 CONNECTOR SMT TYPE

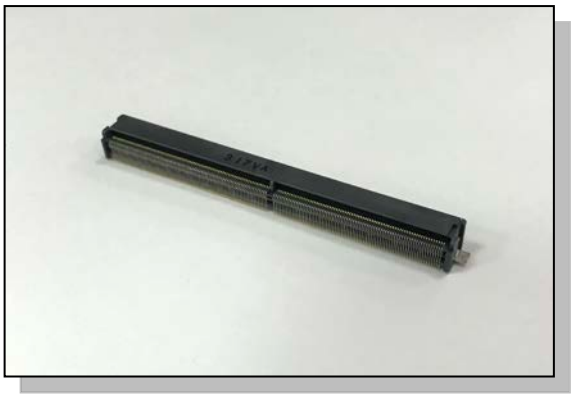

Ordering Information

AS0B82X - S78B-XH

- No. of Pos.: B8: 314 Pos.
- Contact Area Plating: 1 Gold Flash; 6: 10u" Gold; 7: 15u" Gold
- 78: 7.8mm height

Specification

☐ **Material:**
- ♦ **Insulator**: Thermoplastic UL 94V-0 Color: Black
- ♦ **Contact:** Copper Alloy

☐ **Electrical:**
- ♦ **Dielectric Withstanding Voltage:** 500 VAC
- ♦ **Contact Resistance:** 55 mΩ max. initially, 75 mΩ max. after test.
- ♦ **Insulation Resistance:** 250 MΩ Min.

☐ **Mechanical:**
- ♦ **Insertion Force:** 55N Max.
- ♦ **Withdrawal Fore:** 60N Max.

☐ **Environmental:**
- ♦ **Temperature range:** -40°C to + 85°C

❖The above ordering data is for our standard products. For Non-Standard products, please contact us.

Drawing

AS0B82X-S78X-XH Series

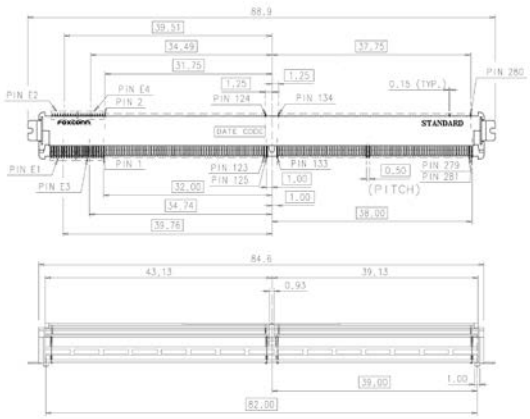
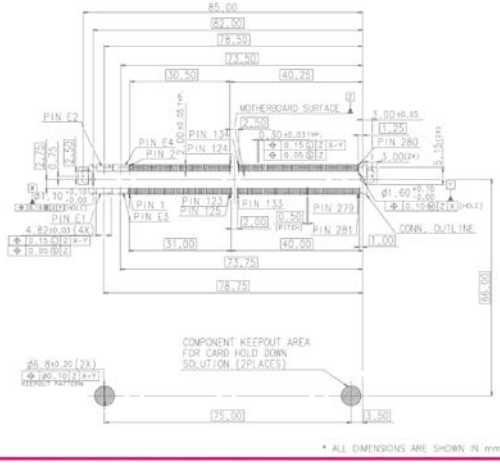
RECOMMENDED P.C.B. LAYOUT