

PT Series

PCI Express OCuLink Plug (Standard Passive)

Ordering Information


PT1142A - 02 - 0H

Contact Area Plating:
A: 15u" Gold

Specification


- **Material:**
 - ◆ **Insulator:**
Thermoplastic UL 94V-0
Color: Black
 - ◆ **Contact:** Copper Alloy
 - ◆ **Metal Shell:** Stainless Steel
- **Electrical:**
 - ◆ **Dielectric Withstanding Voltage:**
250 VDC Min.for 100 MS
 - ◆ **Contact Resistance:**
50 mΩ max. after environment test
 - ◆ **Insulation Resistance:**
100 MΩ Min.
- **Mechanical:**
 - ◆ **Insertion Force:** 8~40N
 - ◆ **Withdrawal Fore:** 8~25N
- **Environmental:**
 - ◆ **Temperature range:** -25°C to + 60°C

❖ The above ordering data is for our standard products. For Non-Standard products, please contact us.

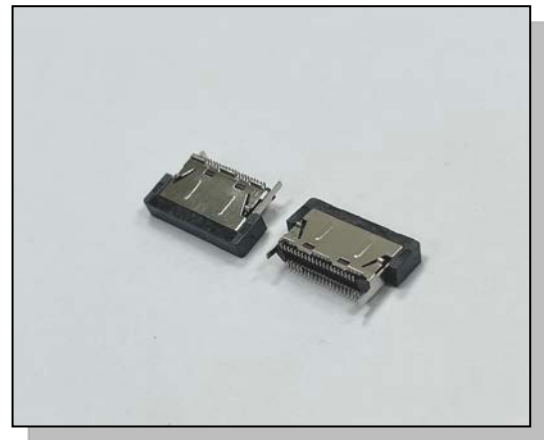

Drawing

PT1142A-02-0H Series

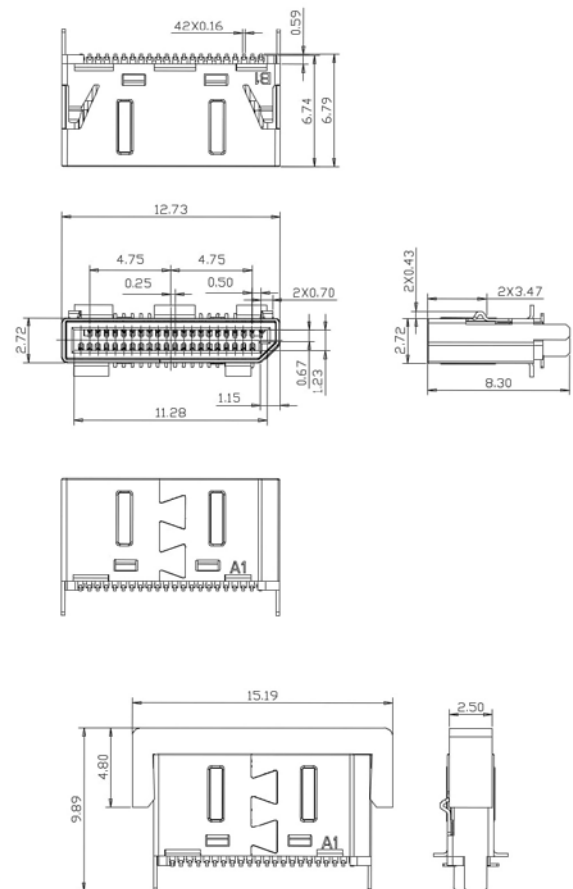

* ALL DIMENSIONS ARE SHOWN IN mm/in