

PT Series

PCI Express OCuLink Plug (Dell Active))

Ordering Information

PT2142A - 01 - 0H

Contact Area Plating:
A: 15u" Gold

Specification

Material:

◆ **Insulator:**

Thermoplastic UL 94V-0
Color: Black

◆ **Contact:** Copper Alloy

◆ **Metal Shell:** Stainless Steel

Electrical:

◆ **Dielectric Withstanding Voltage:**
250 VDC Min.for 100 MS

◆ **Contact Resistance:**

50 mΩ max. after environment test

◆ **Insulation Resistance:**

100 MΩ Min.

Mechanical:


◆ **Insertion Force:** 8~40N

◆ **Withdrawal Force:** 8~25N

Environmental:


◆ **Temperature range:** -25°C to + 60°C

❖ The above ordering data is for our standard products. For Non-Standard products, please contact us.

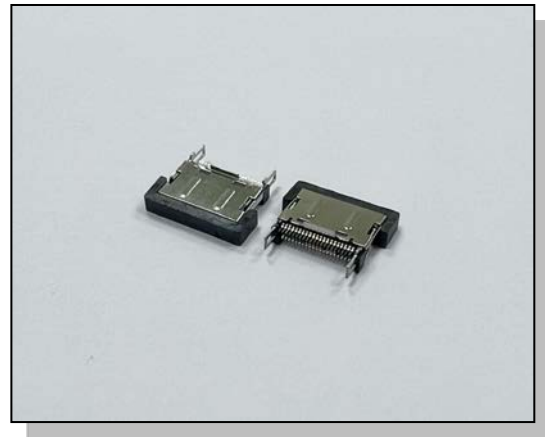

Drawing

PT2142A-01-0H Series

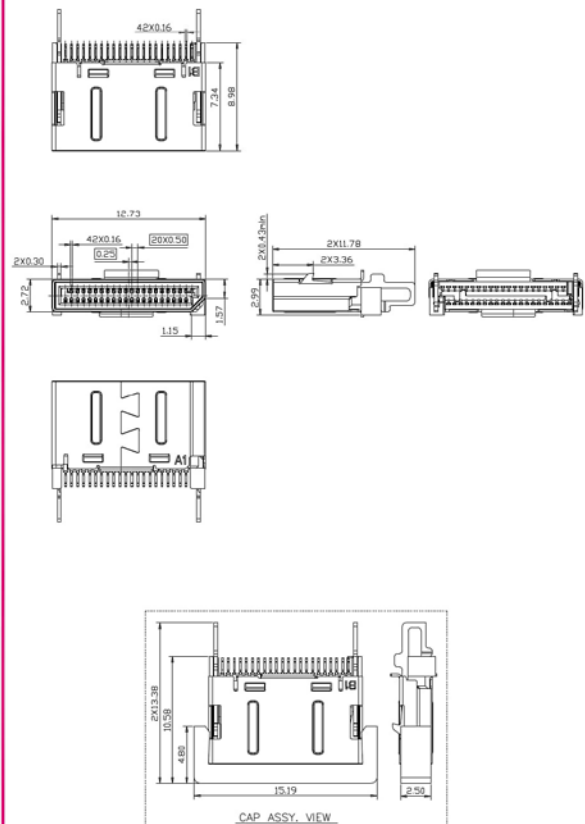

* ALL DIMENSIONS ARE SHOWN IN mm/in