

23 Series

USB Type-C 24 Pin Paddle Card Module
Coaxial Single Side (HZB7X)

Ordering Information

23 - X22 - T1XB7XX

Contact Area Plating:
0: Gold Flash/Tin
3: 30u"Gold Plated/Tin

24 Pin Deep Drawing Shell Plug
9: Housing Color Black
E: Housing Color White

Specification of Plug

- **Material:**
 - ◆ **Insulator:**
Thermoplastic UL 94V-0
Color: Black or White
 - ◆ **Contact:** Copper Alloy
 - ◆ **Shell:** Stainless Steel
- **Electrical:**
 - ◆ **Contact Current Rating:**
VBUS and GND Contacts Rated at 1.25A EA.,
Paralleled for a Total of 5A
 - ◆ **Rated voltage:** 5V Max.
 - ◆ **Dielectric Withstanding Voltage:**
100VAC Min.
 - ◆ **Contact Resistance:**
40mΩ Max. for VBUS, GND and Other Contacts
50mΩ Max. after Environment Test.
 - ◆ **Insulation Resistance:**
100 MΩ Min.
- **Mechanical:**
 - ◆ **Insertion Force:** 5~20N
 - ◆ **Withdrawal Fore:** 8~20N
- **Environmental:**
 - ◆ **Temperature range:** -55°C to + 85°C

❖ The above ordering data is for our standard products. For Non-Standard products, please contact us.


Drawing

23-X22-T1XB7XX Series

TOP VIEW

SIDE VIEW

BOTTOM VIEW

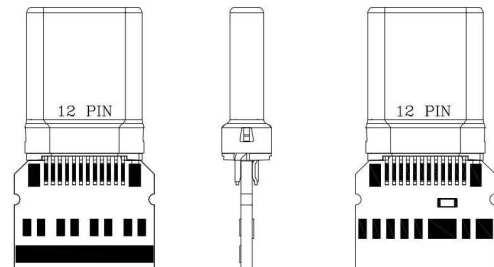

A12	GND	B1	GND
A11	SSRXp2	B2	SSTXp2
A10	SSRXn2	B3	SSTXn2
A9	VBUS	B4	VBUS
A8	SBU1	B5	CC2
A7	Dn1	B6	
A6	Dp1	B7	
A5	CC1	B8	SBU2
A4	VBUS	B9	VBUS
A3	SSTXn1	B10	SSRXn1
A2	SSTXp1	B11	SSRXp1
A1	GND	B12	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME