1137 Series

2.54 mm PIN Header
Triple Row, Right Angle

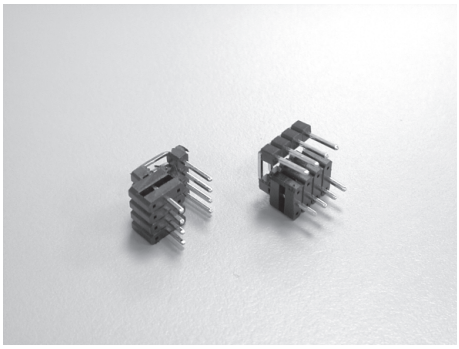

Ordering Information

1137 - X X XX - XX R

Contact Plating
A- Gold Flash
B - 10 μ"
C - 15 μ"
G - 3 μ"
0 - Gold Flash /Tin 100 μ"
1 - 10 μ"/Tin 100 μ"
3 - 30 μ"/Tin 100 μ"
4 - 3 μ"/Tin 100 μ"
5 - 15 μ"/Tin 100 μ"
8 - Tin 100 μ"

Insulator Type
0 - 2.54mm High(PBT)
H - pitch 3.96mm
1- Triple type (PBT)
6 - Dual type(PBT)

PIN Type
SEE DIM. A ,TABLE 1

NO. of Contact
6-90 position

R - Right Angle

Specification

Materials:

- **Insulator:** Glass Reinforced Thermoplastic UL94V-0.
- **Contact:** Copper Alloy 0.025" (0.64mm) square PIN.
- **Plating:** Dual Plate.

Electrical:

- **Insulation Resistance:** 5000 MΩ Minimum.
- **Voltage Rating:** 250 VAC R.M.S.
- **Dielectrical Withstanding Voltage:** 500 VAC R.M.S.
- **Current Rating:** 1 AMP.

Enviromental

- Temperature: -55°C to +125°C

❖ **All Dimensions are shown in in/mm.**
❖ **The above ordering data is for our standard products.**
For Non-Standard products, please contact TEKCON Electronics Corporation.

Dimensions







DIM. A = $\frac{.100"}{2.54mm}$ X < NO. OF SPACE>
DIM. B = DIM. A + $\frac{.100"}{2.54mm}$
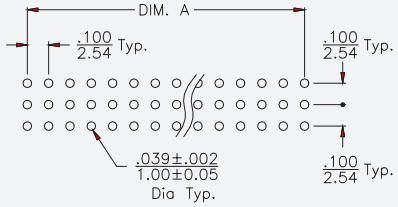
RECOMMENDED P.C.B. LAYOUT