

1156 Series

2.00 mm PIN Header
 Double Row, Right Angle

Ordering Information

1156 - X X XX - XX R


Contact Plating
 0 - Gold Flash/ Tin
 A - Gold Flash

Insulator Type
 0 - 2.00mm
 2 - 1.50mm
 8 - 2.00+2.00+2.00+2.00mm
 B - Thickness 4.3mm

NO. of Contact
 2 TO 80 Positions

PIN Type
 Refer to Drawing

R - Right Angle

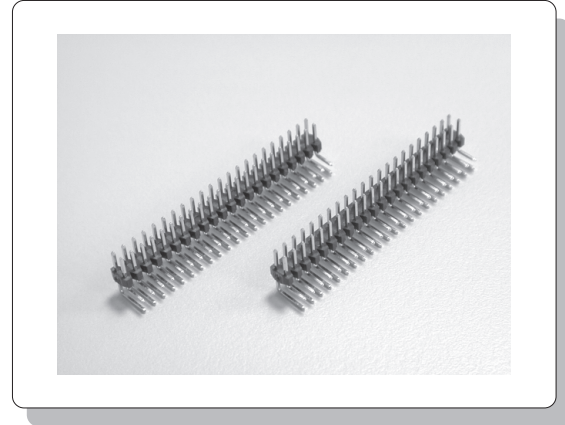

Specification

Materials:

- ♦ **Insulator:** Glass Fiber Thermoplastic, UL94V-0.
- ♦ **Contact:** Copper Alloy, Square PIN.
- ♦ **Plating:** Gold.

Electrical:


- ♦ **Insulation Resistance:** 5000 MΩ Minimum.
- ♦ **Dielectric Withstanding Voltage:** 500 VAC R.M.S.
- ♦ **Voltage Rating:** 250V.
- ♦ **Current Rating:** 1 AMP.

Enviromental

- ♦ Temperature: -55°C to +125°C

❖ All Dimensions are shown in in./mm.
 ❖ The above ordering data is for our standard products.
 For Non-Standard products, please contact
 TEKCON Electronics Corporation.


Dimensions

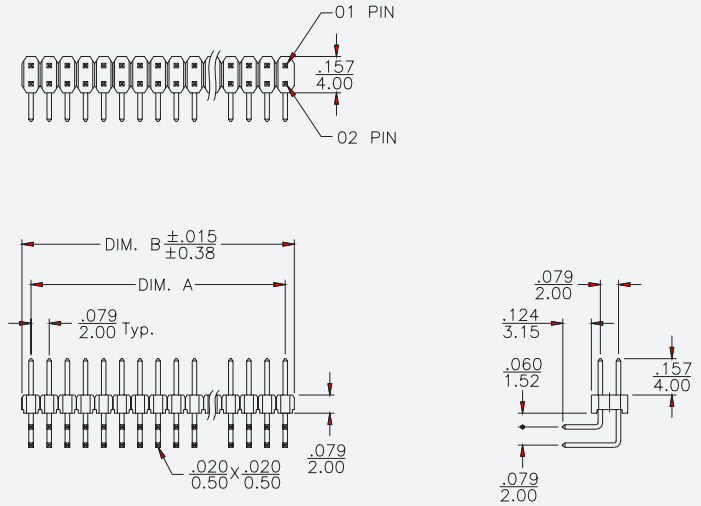

$$DIM. A = \frac{.079''}{2.00mm} \times \langle \text{NO. OF SPACE} \rangle$$

$$DIM. B = DIM. A + \frac{.079''}{2.00mm}$$

RECOMMENDED P.C.B. LAYOUT

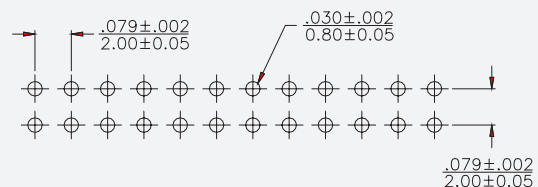

RECOMMENDED P.C.B. HOLE LAYOUT