5430 Series

RJ45+ USB 3.0 Stack W/LED Transformer
10/100/1000 Base – T

Ordering Information

5430 - 360 - 30X - 03

Contact Area Plating:
3: 30u" Gold /Tin

Specification

☐ **Material:**
- ♦ **Insulator**:
  Thermoplastic UL 94V-0
  Color: Black & Blue
- ♦ **Contact:** Copper Alloy
- ♦ **Shell:** Stainless Steel

☐ **Electrical:**
- ♦ **Dielectric Withstanding Voltage:**
  100VAC Min.
- ♦ **Contact Resistance:**
  VBUS and GND contacts: 30 mΩ max.
  Other Contacts: 50 mΩ max.
- ♦ **Insulation Resistance:**
  100 MΩ Min.

☐ **Mechanical:**
- ♦ **Insertion Force:** 35N Max.
- ♦ **Withdrawal Fore:** 10N Min.

☐ **Environmental:**
- ♦ **Temperature range:** 0℃ to + 70℃

❖The above ordering data is for our standard products. For Non-Standard products, please contact us.

Drawing

5430-X60-30X-03 Series

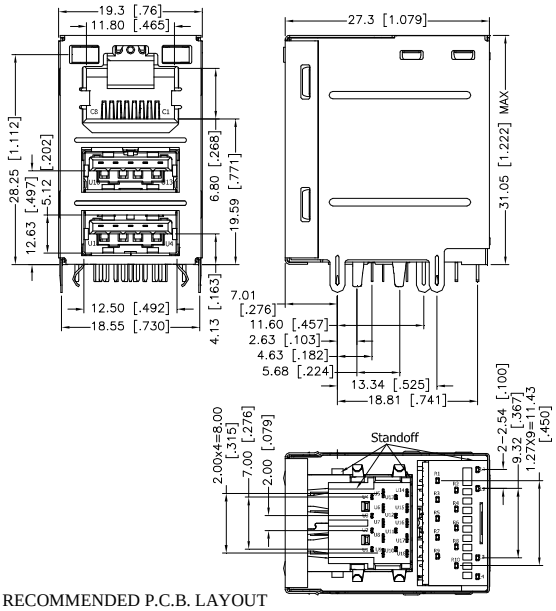
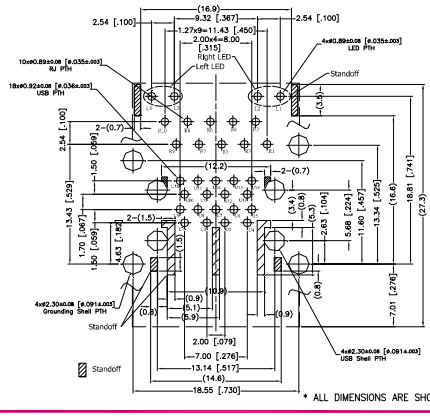
RECOMMENDED P.C.B. LAYOUT